


INFO-Link News

Sensor - Actuator Box

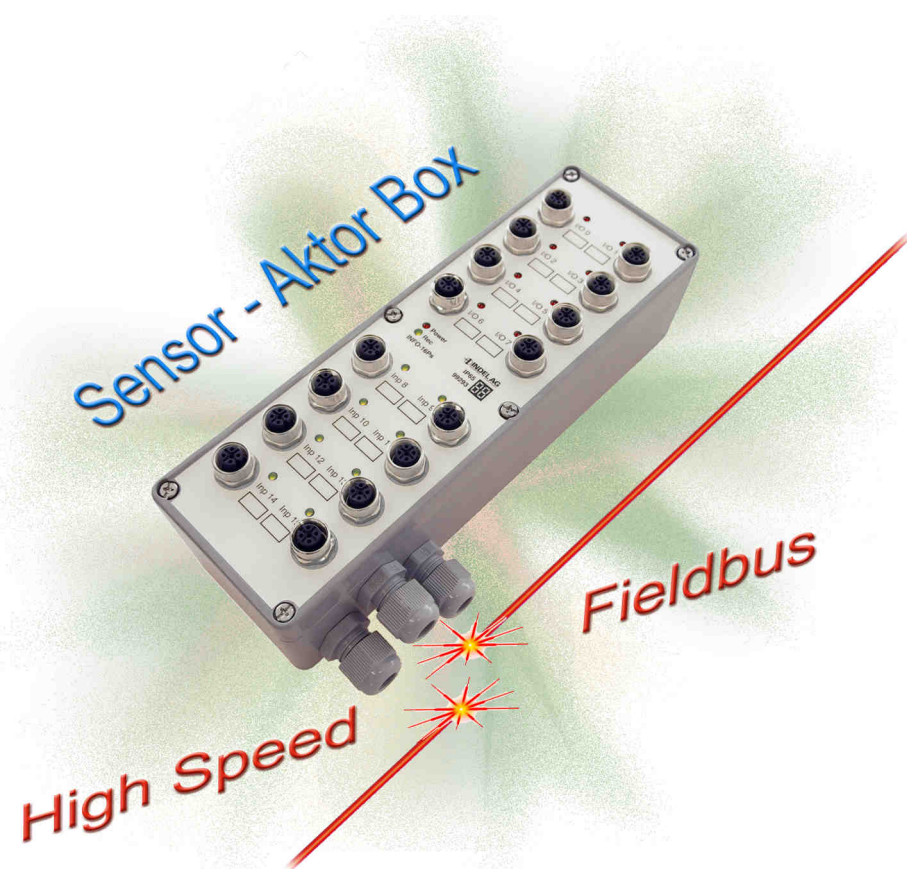

Sensor-Actuator Box for M-12 Connectors IP-65 Protection

- 16 M12 connectors
- 8 inputs
- 8 combined inputs and outputs
- Chemical-resistant polyester casing
- IP-65 protection

Technical Data	INFO-16Ps 99293
Outputs	0 ... 8
Inputs	8 ... 16
Rated voltage	24V DC (18 ... 32V)
Rated current of outputs	0.5 A
Safety	Short-circuit-proof
Required current for inputs	5 mA
Power consumption	120mA with 24V (without load)
Local diagnostics	INFO-Link status, power
Potential isolation	None
Operating temperature	0 ... +45 °C
Storage temperature	-20 ... 70 °C
Relative humidity	95% no condensation
EMC	EN 50081-2 / EN 50082-2
Protection	IP 65
Price (single unit)	723.00 CHF

Separate power supply to logic and outputs for EMERGENCY stop functions, 8 inputs, 8 combined inputs and outputs (input or output, as required), the IP-65 protected polyester casing is ideally suited to rough industrial environments, max. 4000 outputs per INFO-Link, 4µs response time for 16 inputs/outputs, INFO-Link: 11 MBit transmission rate, dimensions: L, W, H: 230 x 75 x 55, CE-compliant.